

## 1500mA Programmable LED Driver

- 347V Input Voltage
- Class 2, 55W Constant Current Output with 0-10V dimming
- Full featured programmability with Wireless Programming




Performance	
Input Voltage	347 Vac
Input Current Max	0.19A
Input Power Max	63W
Input Frequency	50 - 60 (Hz)
Power Factor	> 0.95 @ max load
THD max	< 20 % @ max load
Output Voltage	16V to 37V @ 1.50 Amps (Refer to Driver Operating Range) 16V to 56V @ 0.98 Amps
Max. Output Current	1500mA
Min. Dimming Current	5mA
Output Power	55W
Standby Power	< 3W
Line Regulation	±3 %
Load Regulation	±5 %
Output Current Ripple	<10% (Pk-Pk/avg)
Inrush Current*	347V: 40A / 172uS
Peak / >10% Duration	

\* source impedance per NEMA 410

Physical	
Length	14.25 in
Width	1.18 in
Height	1.00 in
Mounting Length	13.75 in
Weight (lbs)	1.0 lbs
Wire Trap / Plug-in Connectors for 16-22 AWG Solid Wire Strip length 0.33in	

Environmental	
EMI and RFI	Meets FCC part 15 (Class A) Non-Consumer Limits
Sound Rating	Class A
Operating Temperature	-40°C to 50°C (-40°F to 122°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Warranty Tc	85°C max for 50k Hr Life
Location Rating	UL Dry & Damp
Transient Protection	IEEE C62.41 2.5kV

### Wiring Diagram:

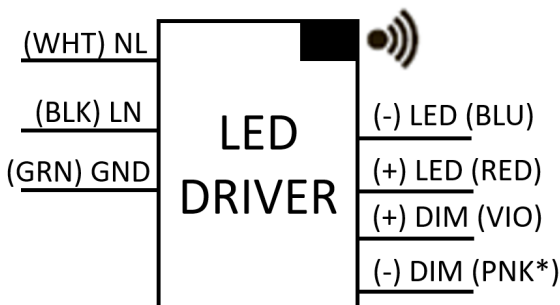

Driver case or green ground terminal must be grounded

- \* **Note:** The Gray has been changed to Pink for the negative 0-10V dimming control lead.

### Protection

Over Voltage, Under Voltage, Short Circuit, Over Temp Safety:

UL 8750 & CSA 250.13  
UL Class P



### Ordering Information

Order Number	Description	Qty/Carton
D15CC55347PW-C010C	1500mA 55W	10

Application and operation performance specification information subject to change without notification.

### Programmable Features


Output Current
Minimum Dimming Level
Dim-to-Off
Dimming Curve (Linear, Linear Soft Start, Logarithmic)
Lumen Maintenance

### Programming System

Software	EVERset Programming Software
Hardware	LDPC000A Configuration Tool
Driver Interface	Wireless via RFID

\*Refer to application notes EVD10 and EVD11 at [www.universaldouglas.com](http://www.universaldouglas.com) for additional information on programmable features.


### Driver Operating Range:

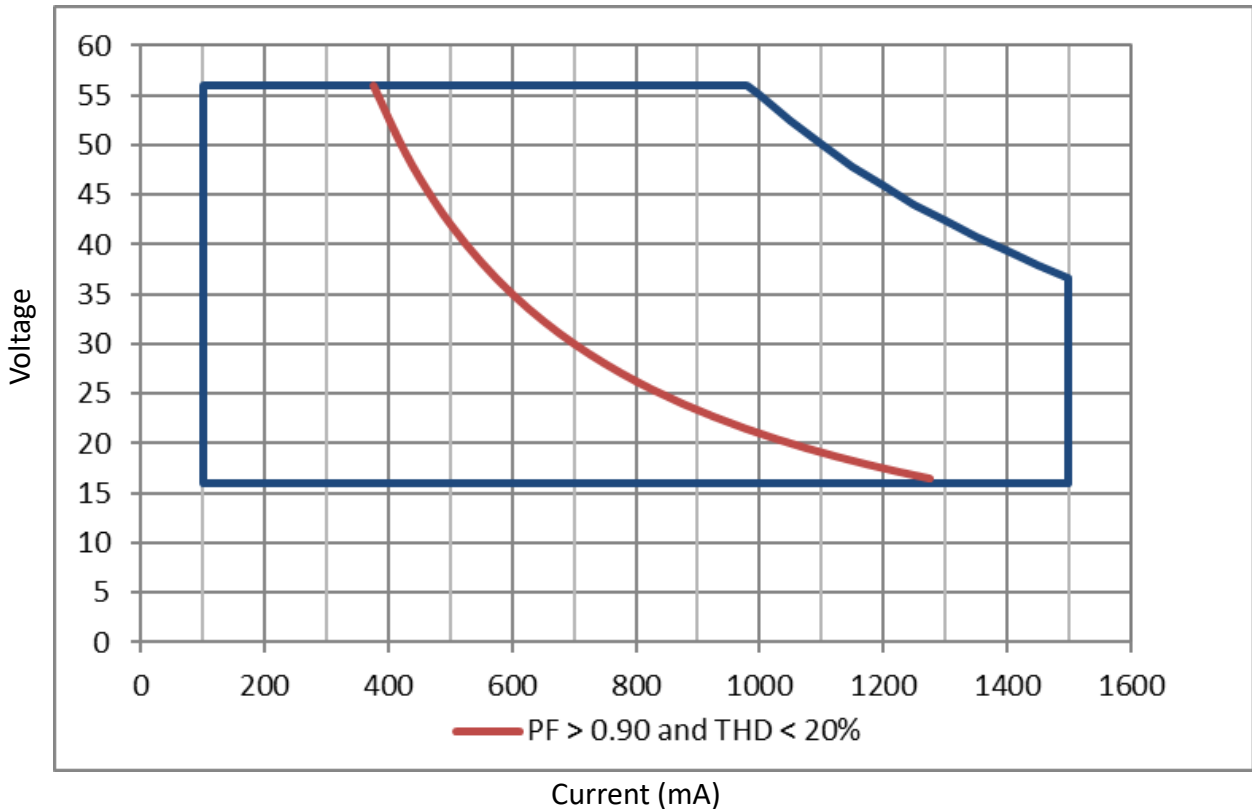


Application and operation performance specification information subject to change without notification.

## 0-10V Dimming

Linear Dimming to 1%

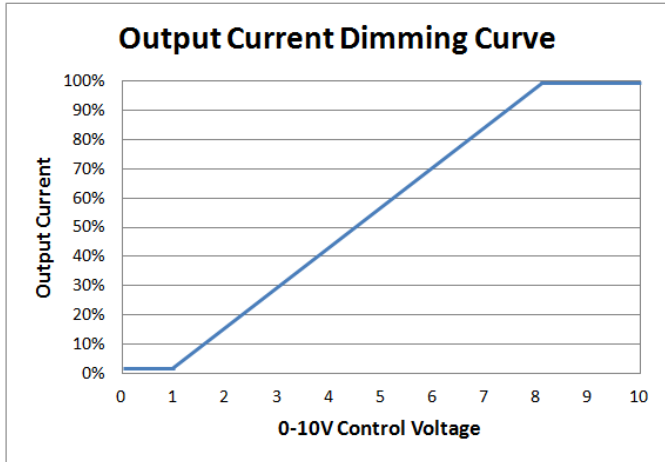

Linear Dimming w/ Dim-to-Off

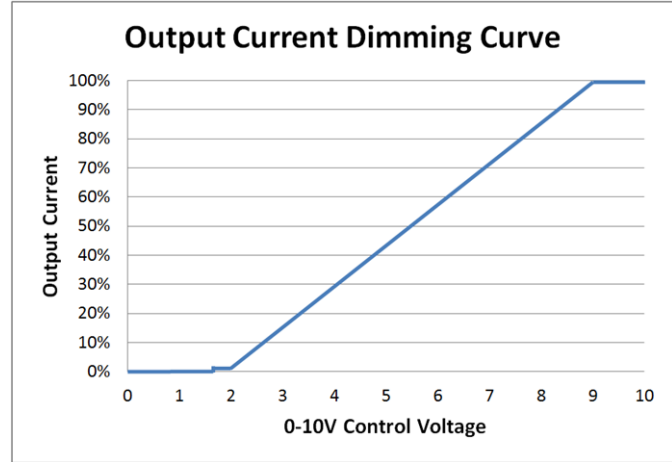

\* Driver ships with Dim-to-Off disabled. Dim-to-Off must be enabled through the EVERset programming software.

### 0-10V Analog Dimming Interface

- Analog 0 to 10 Vdc Voltage Control
- Use Violet (+) & Pink\* (-) for connection to 0-10 Vdc.
- 10V = maximum output
- 0V = dim-to-off or programmed minimum dimming level
- 0-10V interface can be wired as Class 1 or Class 2 Circuit.
- Driver will source a maximum of 165uA for control needs.
- Controller must sink current from the 0-10V control leads.

### Programmable Dimming Features


Feature	Range	Factory Default
Maximum Output Current	100 - 1500mA	default = 1500mA
Minimum Dimming Level	5 - 750mA	default = 15mA
Dimming Curve	(Linear, Linear Soft Start, Logarithmic w/ factor 1 to 7)	default = Linear
Dimming Control Voltage Range		
Max Bright Control Voltage	7 - 9Vdc	default = 8Vdc
Min Dim Level Control Voltage	1 - 3Vdc	default = 1Vdc
Dim-to-Off	0.1 - 1.7Vdc	default = 0Vdc (disabled)

\* Refer to application note EVD10 at [www.universaldouglas.com](http://www.universaldouglas.com) for additional information on programmable dimming features.

Application and operation performance specification information subject to change without notification.

## Performance: Efficiency



Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

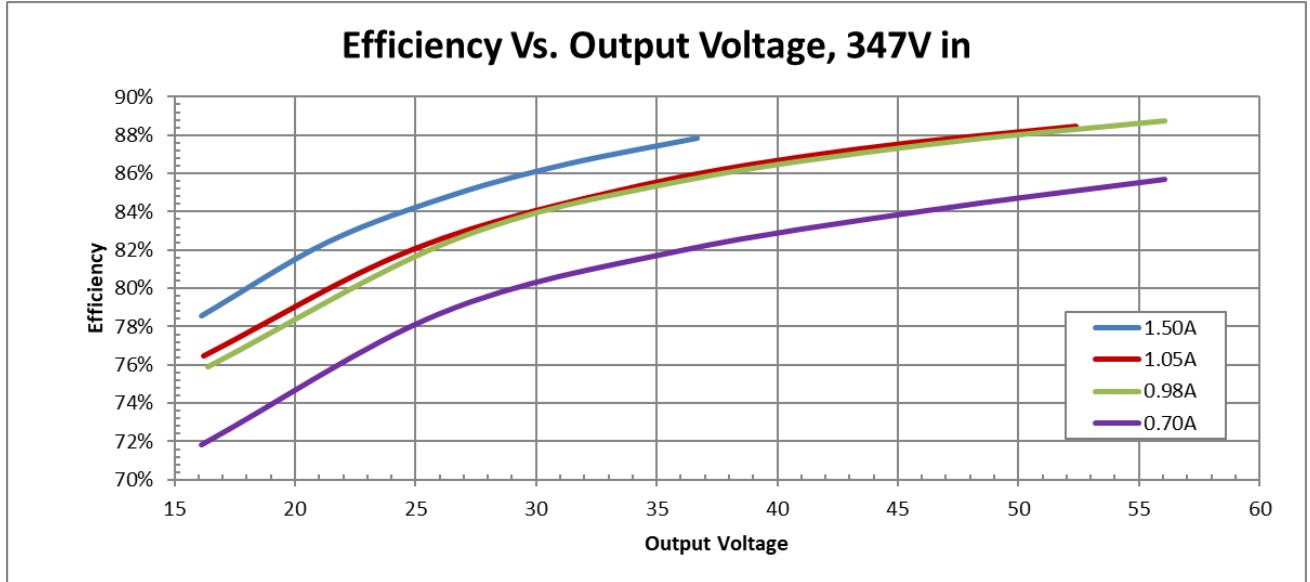

Application and operation performance specification information subject to change without notification.

## Performance: Total Harmonic Distortion, & Power Factor


Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

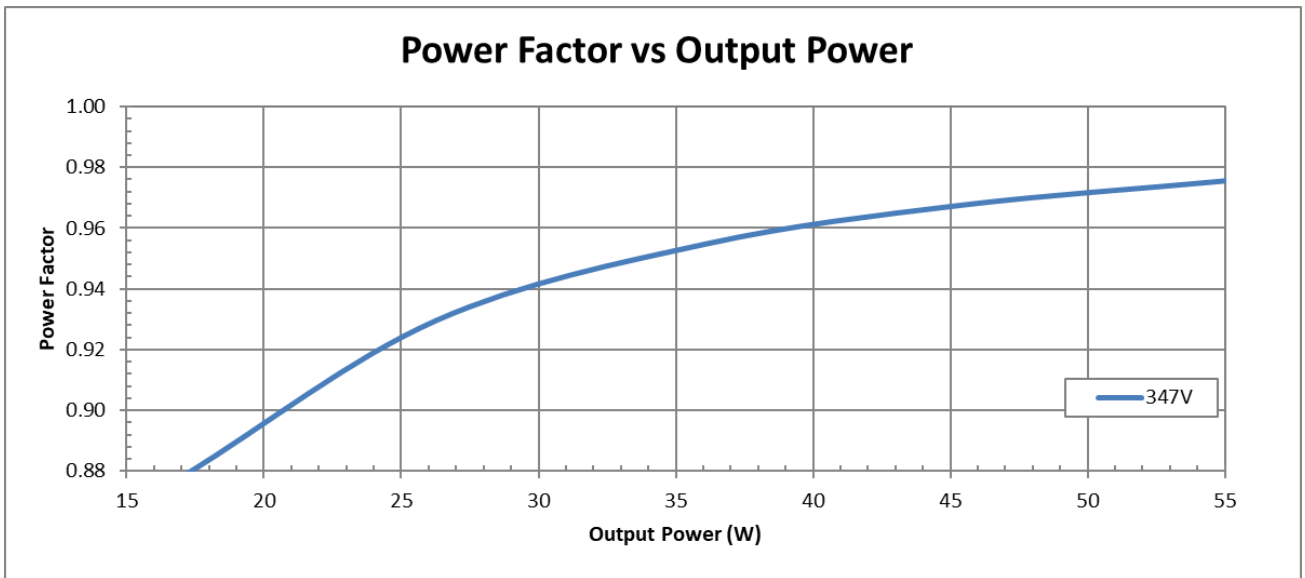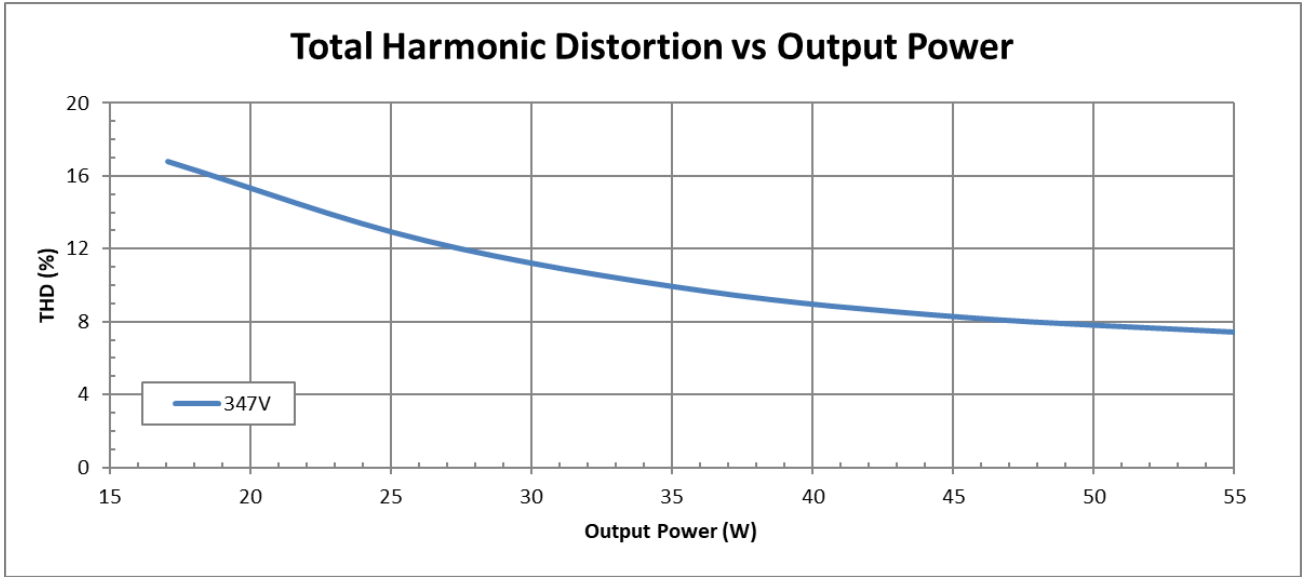


Output power based on maximum rated output current and varying load voltages.

Application and operation performance specification information subject to change without notification.

**Dimensional Diagram:**

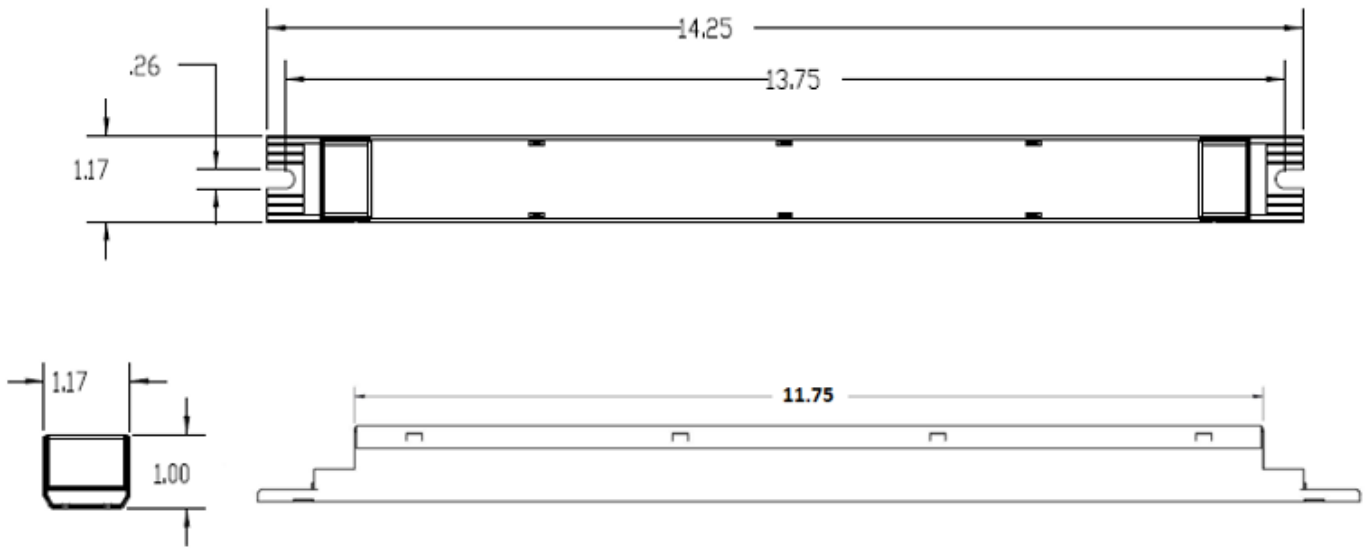

**Lifetime Tc Location:**

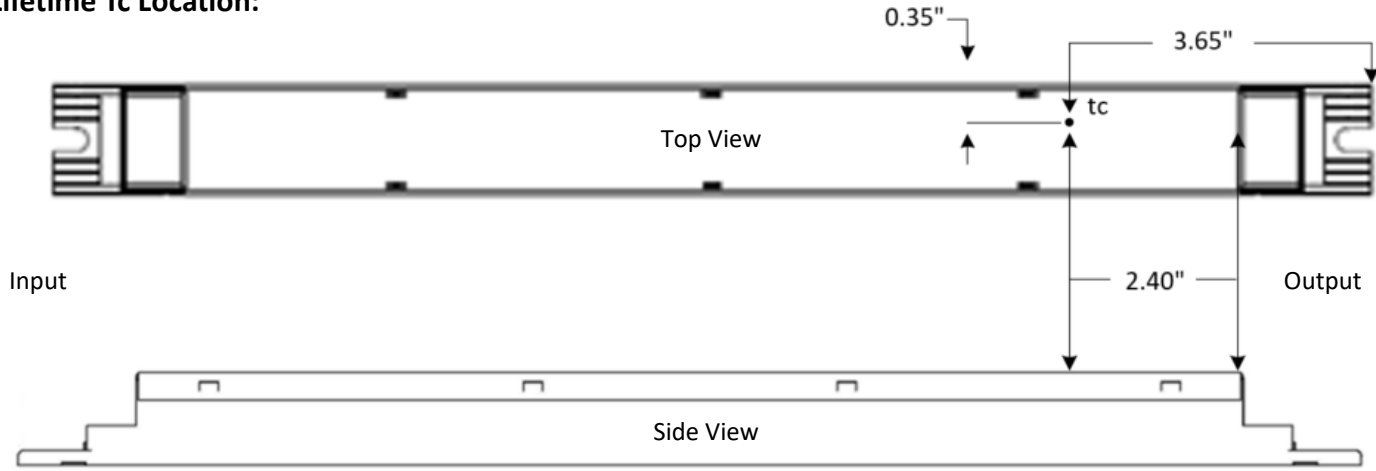

Application and operation performance specification information subject to change without notification.

Transient Protection		
Transient	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
IEEE C62.41 100kHz Ring Wave (200A maximum)	> 2.5kV	> 2.5kV

Isolation				
Isolation	Input	Output	0-10V	Enclosure
Input	-	2xU + 1kV	2xU + 1kV	2xU + 1kV
Output	2xU + 1kV	-	2xU + 1kV	700V
0-10V	2xU + 1kV	2xU + 1kV	-	2xU + 1kV
Enclosure	2xU + 1kV	700V	2xU + 1kV	-

U = Max Input Voltage

FCC Statement: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use. Call 1-800-225-5278 for technical assistance.

Application and operation performance specification information subject to change without notification.