

# D10CC42UNVS-A



## Dimmable LED Driver

- 1050mA Constant Current Output
- Class 2 Output
- Step-Dimming Control

### Performance

Input Voltage	120 ~ 277 Vac
Input Current Max	0.43 /120V 0.20/277V
Input Power Max	50W
Input Frequency	50 - 60 (Hz)
Power Factor	> 0.95
THD max	< 20 %
Output Voltage	14-40V
Output Current	1050mA
Output Power	42W
Line Regulation	±3 %
Load Regulation	±5 %

### Environmental

EMI and RFI	Meets FCC part 15 (Class A) Non-Consumer Limits
Operating Temperature	-40°C to 60°C (-40°F to 140°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
tc	80°C (176°F) max
Protection Rating	UL Dry & Damp
Transient Protection	IEEE C62.41 2.5kV

### Physical

Length	9.50 in (241.3 mm)
Width	1.70 in (43.2 mm)
Height	1.18 in (30.0 mm)
Mounting Length	8.89 in (225.8 mm)
Weight (lbs)	1.7
Lead Lengths	
Blk, Wht, Blk/Wht	12 in
Red(+), Blue(-)	21 in

Lead-wires are 18 AWG 105°C /600V solid copper.

### Protection


Over voltage, Overload and short circuit, over temp.

### Safety:


UL 8750 & CSA107

### Industry Standards:

NEMA SSL-1

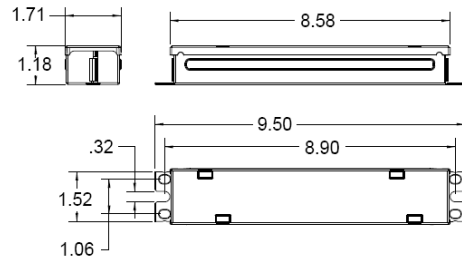

### Wiring Diagram:

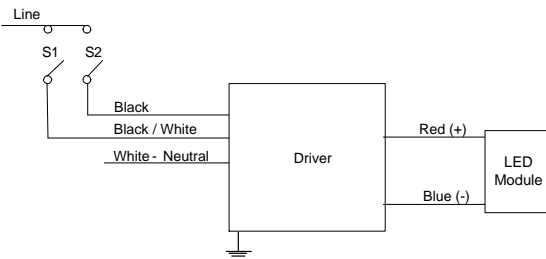

Black and Black/White Leads must be connected to the same phase of the same circuit.

### Step Dimming

- 100% / 50% Maximum dim level

S1	S2	INPUT POWER
OPEN	OPEN	0%
OPEN	CLOSE	50%
CLOSE	OPEN	50%
CLOSE	CLOSE	100%



## Conditions of Acceptability –

1. The drivers shall be installed in compliance with the applicable requirements of the end-product standard for, mounting, spacing, casualty and segregation
2. The maximum available output parameters are within the maximum allowable limits for Class 2, inherently limited as specified in the UL 1310 standard for Class 2 Power Units.
3. The Driver is suitable for use in “DRY” or “DAMP” locations.
4. The driver was evaluated for use in a 60°C elevated ambient and the maximum case temperature at (Tc) location – as identified on the label in ILL. 1 - should not exceed 81°C when the driver is installed in the end-use application.
5. The leakage current of these units shall be considered in the end-use application.
6. The primary (Black, White, and Black with white dots) and the output (Red-Blue) and control dimming 0-10V (purple-Gray) connection wires of the driver are R/C (AVLV2/8), 18 AWG, 90°C. The suitability of the leads shall be determined in the end-use application.
7. The need to perform the Strain Relief and/or Pushback Relief Tests on the lead wires should be determined in the end-use application.
8. The case must be grounded in the end use.

## Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use. Call 1-800-225-5278 for technical assistance.

Application and operation performance specification information subject to change without notification.