

## 12Vdc, 0.10A Auxiliary Power Supply


- 120-347V Input Voltage
- Class 2, 1.2W Constant Voltage Output



Performance	
Input Voltage	120 ~ 347 Vac
Input Current Max	0.015 / 120V 0.08 / 347V
Input Power Max	2.0W
Input Frequency	50 - 60 (Hz)
Power Factor	> 0.95 @ max load
THD max	< 20 % @ max load
Output Voltage	12V
Max. Output Current	0.1A
Output Power	1.2W

Physical	
Length	3.9 in
Width	1.82 in
Height	1.38 in
Mounting Length	3.69 in
Weight (lbs)	0.4 lbs
Wire	
Black & White, 18 AWG, 12 in.	12 in.
Orange & Yellow, 20 AWG, 24 in.	24 in.

### Wiring Diagram:

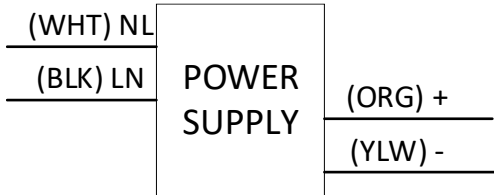

Safety:  
UL 60730-1  
CAN/CSA-E60730-1.



Environmental	
EMI and RFI	Meets FCC part 15 (Class A) Non-Consumer Limits
Sound Rating	Class A
Operating Temperature	-40°C to 55°C (-40°F to 131°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Warranty Tc	85°C max for 50k Hr Life
Location Rating	UL Dry & Damp
Transient Protection	IEEE C62.41 2.5kV

### Ordering Information

Order Number	Description	Qty/Carton
P12V01WRV-GA020C	12Vdc, 0.1A	20

### Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use. Call 1-800-225-5278 for technical assistance.

Application and operation performance specification information subject to change without notification.