

# D21CC80UVPWA24-D

## 2100mA Programmable LED Driver

- Universal (120-277V) Input Voltage
- Class 2, 80W Constant Current Output with 0-10V dimming
- Full featured programmability with 24Vdc 50mA auxiliary output




### Performance

Input Voltage	120 ~ 277 Vac
Input Current Max	0.77/120V 0.33/277V
Input Power Max	93W
Input Frequency	50 - 60 (Hz)
Power Factor*	> 0.95
THD max*	< 20 %
Output Voltage	15V to 38V @ 2.10 Amps (Refer to Power Curve Chart) 15V to 56V @ 1.40 Amps
Max. Output Current	2100mA
Min. Dimming Current	21mA
Output Power	80W
Standby Power	< 2.8W @120Vac < 3.5W @ 277Vac
Line Regulation	±3 %
Load Regulation	±5 %
Output Current Ripple	<10% (Pk-Pk/avg)
Inrush Current	120V: 18A / 250uS
Peak / >50% Duration	277V: 32A / 250uS

- \* Refer to charts for additional information
- Harmonic Emissions comply with ANSI C82.77
  - Inrush current complies with NEMA 410

### Wiring Diagram:

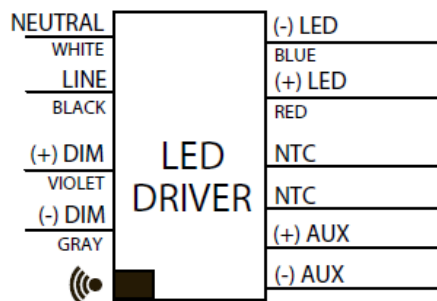

### Auxiliary Output

Output Voltage	24Vdc
Output Current	50 mA

### Physical

Length	16.88 in (428.7 mm)
Width	1.25 in (31.8 mm)
Height	1.00 in (25.4 mm)
Mounting Length	16.28 in (413.5 mm)
Weight (lbs)	1.25
Wire Trap / Plug-in Connectors for 16-24 AWG Solid Wire	

### Environmental

EMI and RFI	Meets FCC part 15 (Class A) Non-Consumer Limits
Min. Operating Temperature	-40°C (-40°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
tc	85°C (185°F) max
Protection Rating	UL Dry & Damp
Transient Protection	IEEE C62.41 2.5kV

Protection  
Over Voltage, Under Voltage, Short Circuit, Over Temp  
Safety:  
UL 8750 & CSA 250.13  
UL Class P



### Ordering Information

Order Number	Description	Qty/Carton
D21CC80UVPWA24-D010C	Standard Product	10



Application and operation performance specification information subject to change without notification.



### Programmable Features


Output Current
Minimum Dimming Level
Dim-to-Off
Dimming Curve (Linear, Linear Soft Start, Logarithmic)

\*Refer to application note EVD10 at [www.unvlt.com](http://www.unvlt.com) for additional information on programmable features.

### Programming System

Software	EVERset Programming Software
Hardware	LDPC000A Configuration Tool
Driver Interfaces	Wired via 0-10V leads
	Wireless via RFID

### Driver Operating Range:

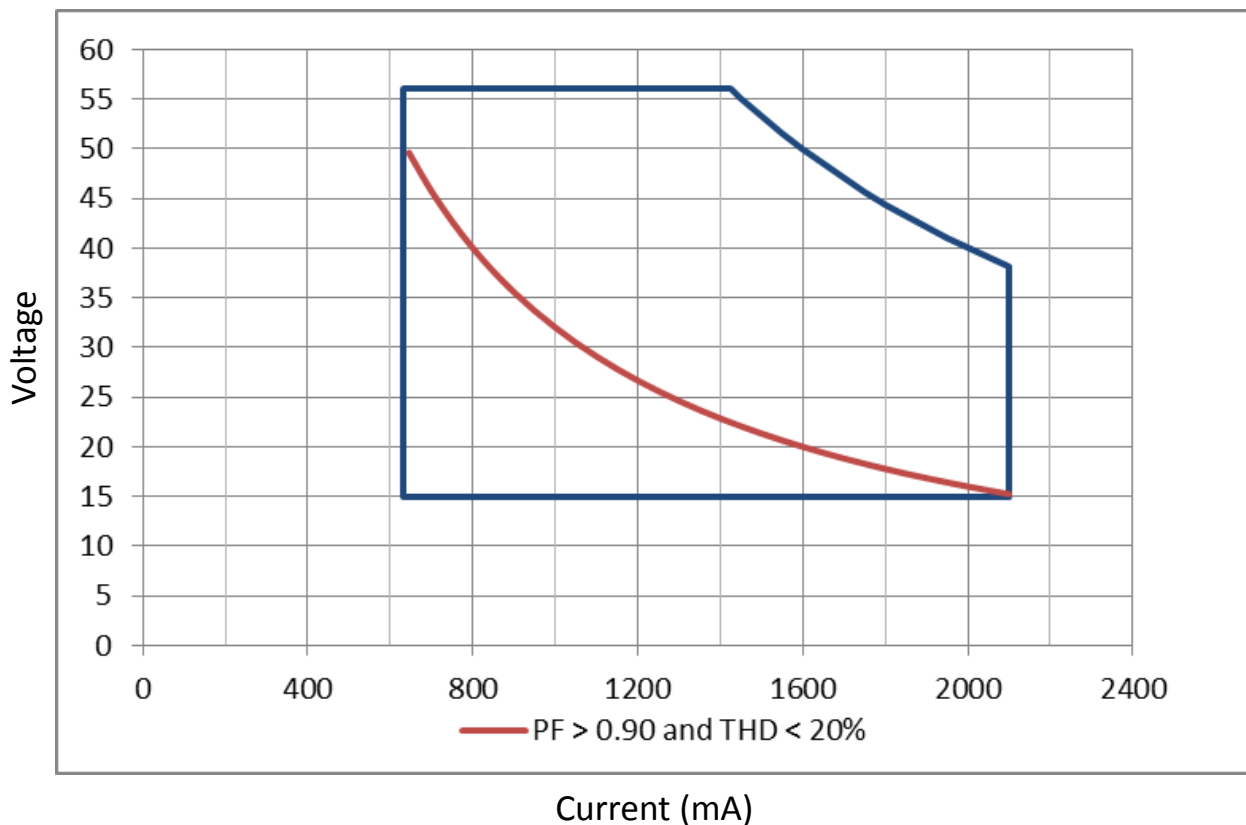


Application and operation performance specification information subject to change without notification.




## 0-10V Dimming

Linear Dimming to 1%

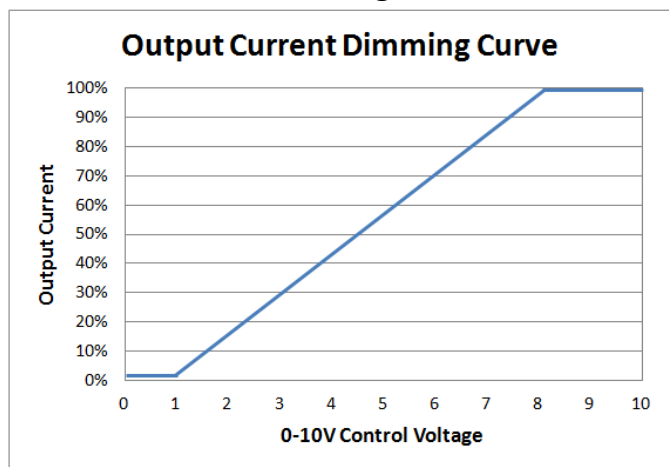

Linear Dimming w/ Dim-to-Off\*

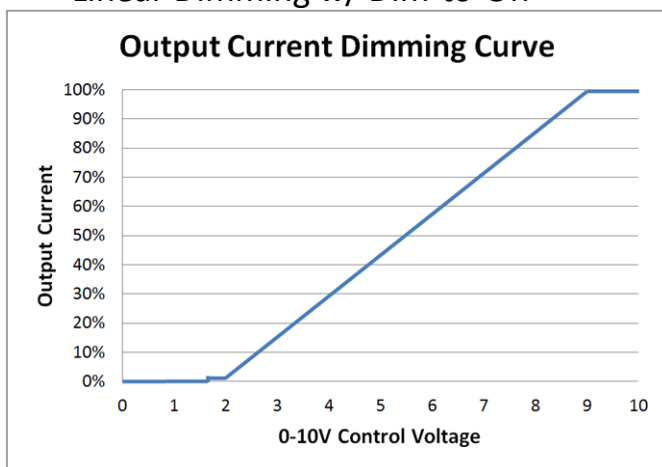

\* Driver ships with Dim-to-Off disabled. Dim-to-Off must be enabled through the EVERset programming software.

### 0-10V Analog Dimming Interface

- Analog 0 to 10 vDC Voltage Control
- Use Violet (+) & Gray (-) for connection to 0-10vDC.
- 10v = maximum output, 0v = minimum output
- Wiring Violet & Gray together provides min. light output.
- Capping Violet & Gray separately provides 100% light output.
- 0-10V interface can be wired as Class 1 or Class 2 Circuit.
- Driver will source a maximum of 200uA for control needs.
- Controller must sink current from the 0-10V control leads.

### Programmable Dimming Features

Feature	Range	Factory Default
Maximum Output Current	630 - 2100mA	default = 2100mA
Minimum Dimming Level	21 - 525mA	default = 21mA
Dimming Curve	(Linear, Linear Soft Start, Logarithmic w/ factor 1 to 7)	default = Linear
Dimming Control Voltage Range		
Max Bright Control Voltage	7 - 9Vdc	default = 8Vdc
Min Dim Level Control Voltage	1 - 3Vdc	default = 1Vdc
Dim-to-Off	0.1 - 1.7Vdc	default = 0Vdc (disabled)

\* Refer to application note EVD10 at [www.unvlt.com](http://www.unvlt.com) for additional information on programmable dimming features.





Application and operation performance specification information subject to change without notification.



## Performance: Efficiency

Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

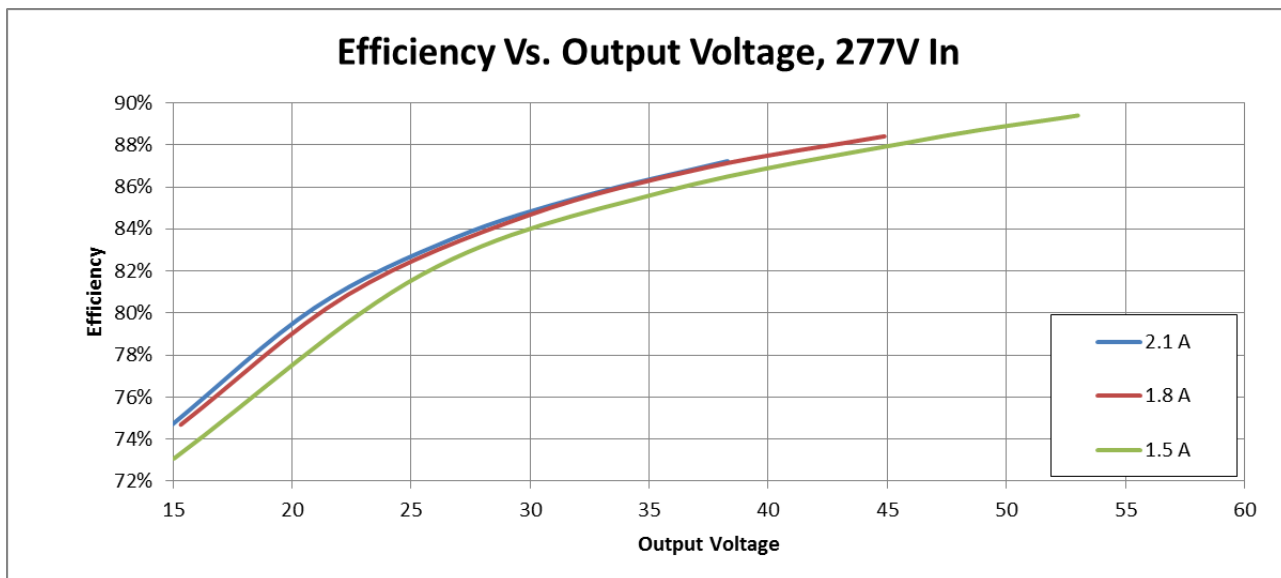
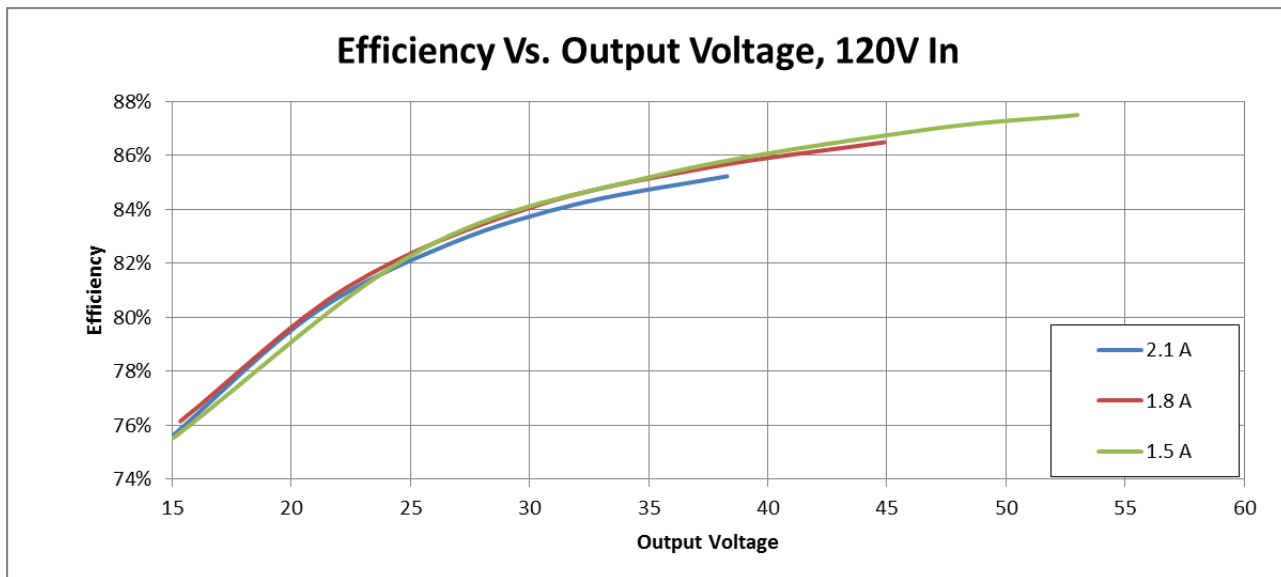


Application and operation performance specification information subject to change without notification.



## Performance: Total Harmonic Distortion, & Power Factor

Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

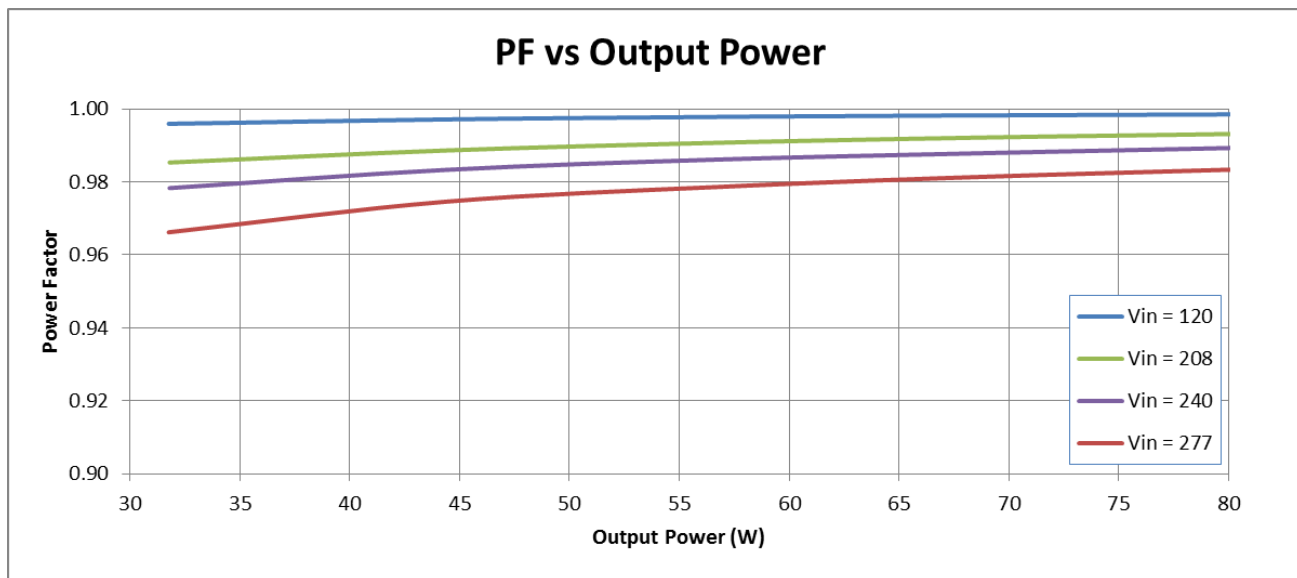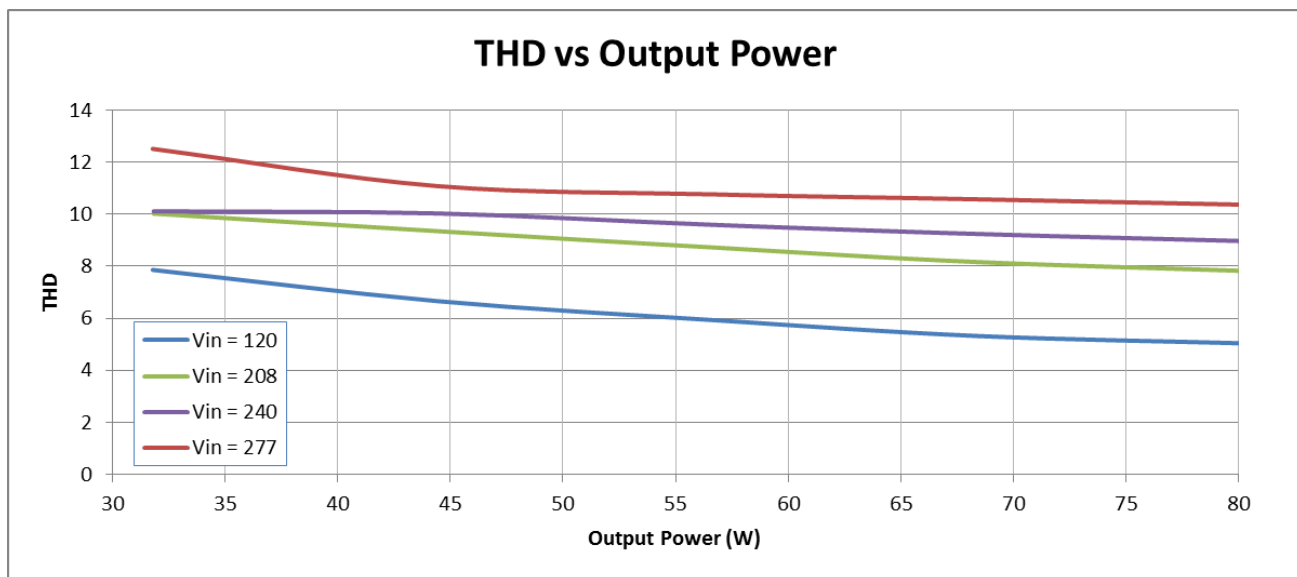

Output power based on maximum rated output current and varying load voltages.



Application and operation performance specification information subject to change without notification.




Transient Protection		
Transient	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
IEEE C62.41 100kHz Ring Wave (200A maximum)	> 2.5kV	> 2.5kV

Isolation						
Isolation	Input	Output	0-10V	Auxiliary	NTC	Enclosure
Input	-	2xU + 1kV	2xU + 1kV	2xU + 1kV	2xU + 1kV	2xU + 1kV
Output	2xU + 1kV	-	2xU + 1kV	Non-isolated	Non-isolated	700V
0-10V	2xU + 1kV	2xU + 1kV	-	2xU + 1kV	2xU + 1kV	2xU + 1kV
Auxiliary	2xU + 1kV	Non-isolated	2xU + 1kV	-	Non-isolated	700V
NTC	2xU + 1kV	Non-isolated	2xU + 1kV	Non-isolated	-	2xU + 1kV
Enclosure	2xU + 1kV	700V	2xU + 1kV	700V	2xU + 1kV	-

U = Max Input Voltage

## Driver Lifetime vs. Driver Case Temperature

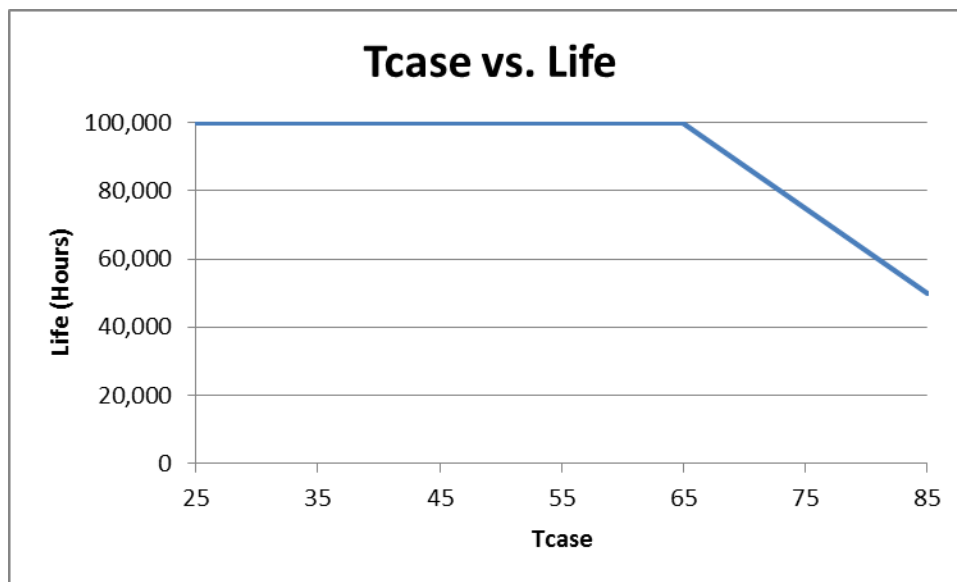


The Data curve provided predicts the LED Driver life based on the case temperature measured at the Tc location identified on the label or specification sheet. The Telecordia SR-332 standard is used to generate the prediction curves.




Application and operation performance specification information subject to change without notification.



### Dimensional Diagram:

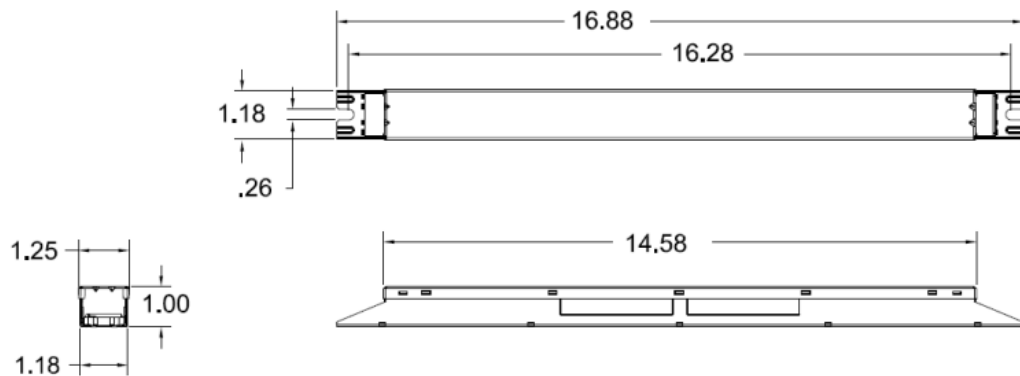

### Tc Location:

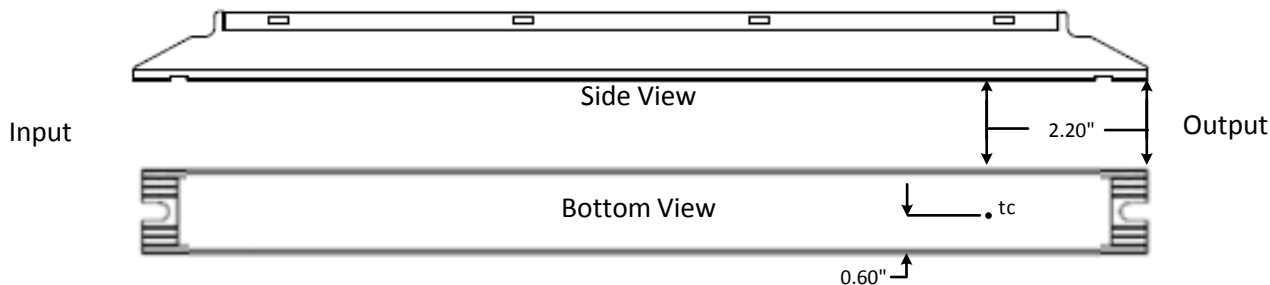

FCC Statement: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use. Call 1-800-225-5278 for technical assistance.



Application and operation performance specification information subject to change without notification.